


HOLLY

AVAILABLE MATERIALS

- Multi-legged sheet metal shell with machine screw, zinc plated

FEATURES/ADVANTAGES

- Light to medium loads under dead or variable conditions in a variety of hollow base materials
- Expanded, the shell is permanently installed and fixtures can be exchanged by removing and replacing the screw
- Drive Holly does not require a pre-drilled hole in gypsum board

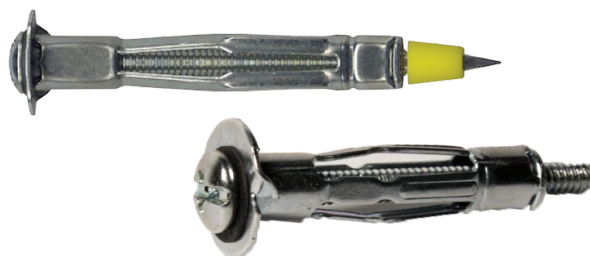

CONSIDERATIONS

- Hollow construction only

ORDER DETAIL

Order Code	Size	Hole Diameter	Grip Range	Tension	Material Type	Shear	Minimum Wall Thickness	Box Qty.	Master Qty.
0120000	1/8" XS	5/16"	0" - 3/16"	—	Gypsum Wallboard	—	1/16"	100	3,000
0121000	1/8" SR	5/16"	1/8" - 5/8"	90	Gypsum Wallboard	165	1/8"	100	1,200
0122000	1/8" LR	5/16"	5/8" - 1-1/4"	130	Gypsum Wallboard	205	5/8"	100	800
0123000	1/8" XLR	5/16"	1-1/4" - 1-3/4"	260	Gypsum Wallboard	320	1-1/4"	100	800
0130000	3/16" SR	3/8"	1/8" - 3/4"	135	Gypsum Wallboard	300	1/8"	100	500
0131000	3/16" LR	3/8"	3/4" - 1-1/4"	260	Gypsum Wallboard	485	3/4"	100	500
0132000	3/16" XLR	3/8"	1-1/4" - 1-3/4"	300	Gypsum Wallboard	490	1-1/4"	100	300
0140000	1/4" SR	7/16"	1/8" - 5/8"	140	Gypsum Wallboard	300	1/8"	100	500
0141000	1/4" LR	7/16"	5/8" - 1-1/4"	165	Gypsum Wallboard	550	5/8"	50	400
0142000	1/4" XLR	7/16"	1-1/4" - 1-3/4"	200	Gypsum Wallboard	575	1-1/4"	50	400

Drive Holly

0150000	1/8" XSD	DRIVE N/A	1/16" - 1/4"	—	Gypsum Wallboard	—	1/16"	100	1,200
0151000	1/8" SD	DRIVE N/A	1/8" - 1/2"	25	Gypsum Wallboard	90	1/8"	100	1,200
0152000	1/8" SLD	DRIVE N/A	1/8" - 3/4"	85	Gypsum Wallboard	175	1/8"	100	1,200

Setting Tool

0110000	Holly Setting Tool							1	—
---------	--------------------	--	--	--	--	--	--	---	---

INSTALLATION

- Drill hole through the base material same diameter as fastener.
- Clean hole of debris.
- Insert the fastener through the material and tap until head is flat against the wall surface.
- Turn screw with screwdriver until fastener is expanded. Can also be set using a Holly Setting Tool.
- Remove screw.
- Place fixture. Replace screw through fixture and tighten.

